



## Clean Glass Matters!

### Specifications:-

|                                        |                                     |
|----------------------------------------|-------------------------------------|
| Depth - Door Open                      | 891mm                               |
| Rack Size (Square)                     | 40x40 cm                            |
| Maximum Pints Per Rack                 | 16                                  |
| Door Opening Height                    | 320mm                               |
| Maximum Clear Entry Height             | 300mm                               |
| Operating Level                        | 292mm                               |
| Net Weight                             | 40kg                                |
| Gross Weight                           | 46 Kg                               |
| Rinse Booster Pump                     | Optional C2104                      |
| Built in Detergent Dispenser           | Optional C2105                      |
| Built in Rinse aid Dispenser           | Standard                            |
| Double Skinned door                    | Standard + Partial Double Skin Body |
| Maximum racks per hour - water @50°C   | 30                                  |
| Cycle Times                            | 2 minutes                           |
| Water connection - BSP                 | G 3/4"                              |
| Water inlet height from floor level    | 60mm                                |
| Required water pressure (flow)         | 3 bar                               |
| Required Water Flow                    | 100 lt/hour                         |
| Drain Type                             | gravity (Optional Drain Pump C2103) |
| Drain Size                             | 23mm intern.diam.                   |
| Operating Voltage                      | 230 V ~ 50 Hz /400 V3N~ 50 Hz       |
| Amps Required                          | 15 A (5 A in 400V)                  |
| Total Connection Load                  | 3,33Kw                              |
| Temperature interlock                  | Standard                            |
| Quick start model                      | Standard                            |
| Wash Tank heating                      | 2.4 kW                              |
| Rinse Boiler Heating                   | 3 kW                                |
| Wash Pump Size                         | 150 lt/min                          |
| Wash Pump                              | 330 W                               |
| Tank Capacity                          | 12 Liters                           |
| Wash Tank Operating Temperature        | 55°C                                |
| Rinse Boiler Capacity                  | 3 Liters                            |
| Rinse Boiler Operating Temperature     | 82°C                                |
| Max/Min stand pipe height from floor   | 60mm                                |
| max/ min water pressure                | 0.2MPa - 0.5MPa                     |
| Minimum Water Flow                     | 100 lt/hour                         |
| Temperature dials for tanks and boiler | mechanical thermostat               |

#### GENERAL FEATURE

- Electronic Control
- Magnetic Door Micro Switch
- Hot Rinse & Automatic Water Filling
- Electric Peristaltic Rinse aid dispenser - Adjustable
- Automatic Water Filling
- Thermostop Function
- Non Return Valve Standard
- Plastic wash pump filter, easily removable

#### BODY

- 100% Stainless Steel body
- Partial Double Skinned Body
- Double Skinned Door
- Pressed basket supports for an easy cleaning
- Stainless Steel Door Handle
- Stainless Steel Wash / Rinse Arms , Easily Removable
- Preformed bottom of wash tank with rounded corners for total draining

#### EQUIPMENT INCLUDED WITH GLASS WASHER

- 2 Glass Rack 40x40 cm
- 1 Cutlery small basket
- 1 Insert for Saucers
- 1 Inlet Hose (length 2 m)
- 1 Drain Hose (length 2,5m)

#### OPTIONAL

- Kit Electric Detergent Dispenser
- Kit Electric Rinse-aid dispenser
- Kit Drain Pump
- Kit External Rinser Booster Pump
- Cold Rinse
- Stainless Steel Tank filters for pre-filtering of tank water



#### ACCESSORIES FOR WATER TREATMENT

- Internal Water Softener "S Version"
- Special Racks (Round,dia.cm.35)

## Options Available:-

| Part No. | Part Name                      | Dimensions                  |
|----------|--------------------------------|-----------------------------|
| C2052    | Glass Dishwasher - Lxi         | 440mm L x 497mm W x 630mm H |
| C2053.WS | Glass Dishwasher Water Softner | 455mm L x 550mm W x 690mm H |
| C2052.WS | Glass Dishwasher Water Softner | 440mm L x 497mm W x 630mm H |

## Product Dimensions:-

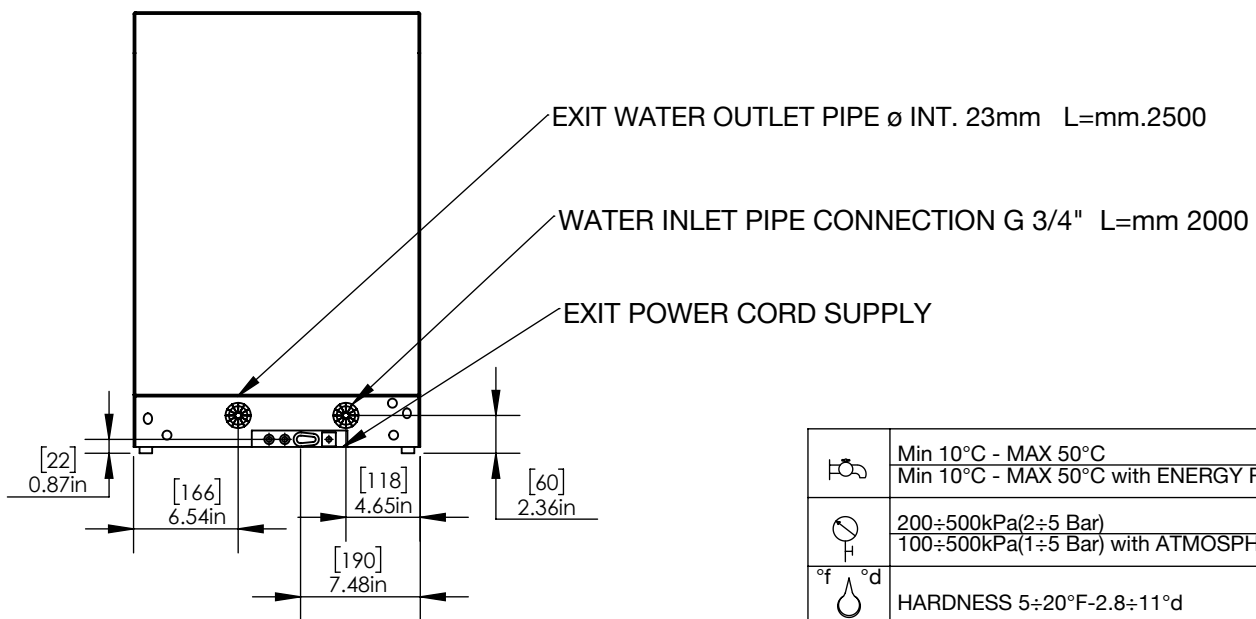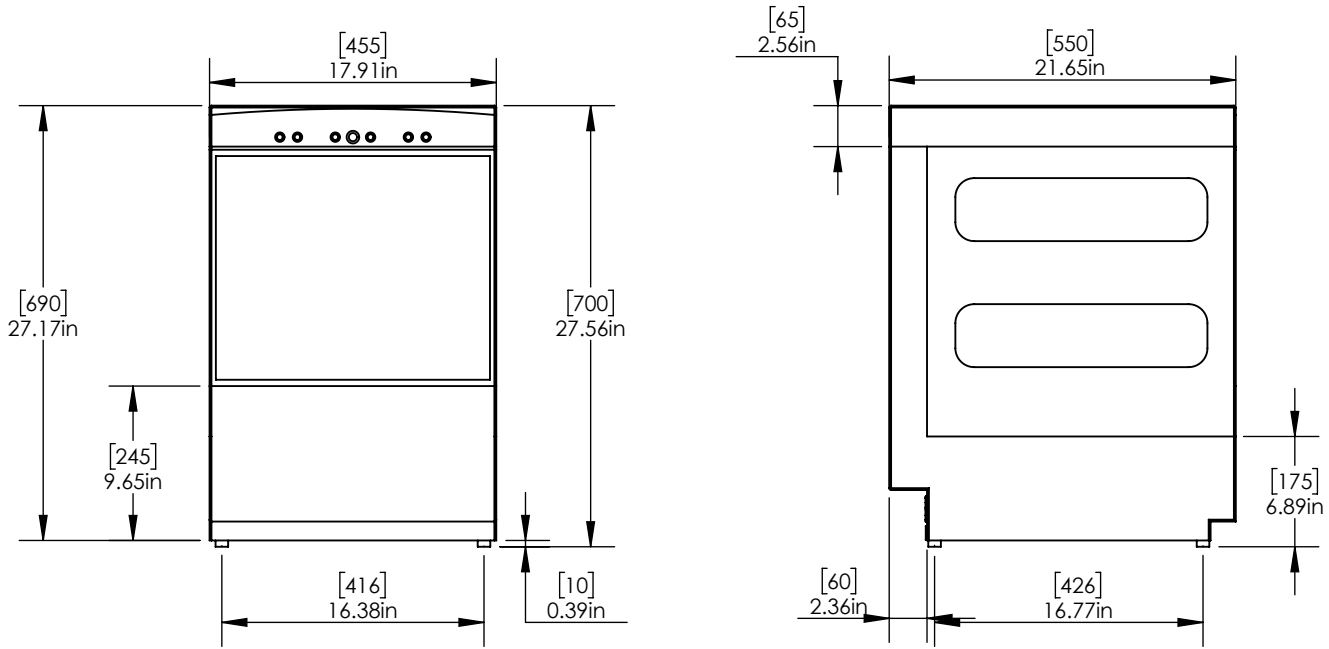

|  |                                                                    |
|--|--------------------------------------------------------------------|
|  | Min 10°C - MAX 50°C<br>Min 10°C - MAX 50°C with ENERGY RECOVERY    |
|  | 200÷500kPa(2÷5 Bar)<br>100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER |
|  | HARDNESS 5÷20°F-2.8÷11°d                                           |

US & Canada :- +1-678 666 2001

Asia:- +91-9814203010

Krome Dispense reserves the right to make revisions to product specifications without any notice

For most updated specification sheet , go to [www.kromedispense.com](http://www.kromedispense.com)

